


Model	BL-600M	BL-1000M
Capacity	600VA/360W	1000VA/600W
Front panel & Rear panel		
AVR	3 steps of AVR, CPU controlled	
INPUT		
Input voltage range	145~290VAC±5VAC	
Input frequency range	50Hz / 60Hz (Auto sensing)	
OUTPUT		
Output voltage range	200~255VAC	
Output frequency (DC mode)	50±0.5Hz / 60±0.5Hz	
Wave form	Stepped Sinewave (DC Mode)	
Transfer time	Typical 2~6ms, Max. 10ms.	
BATTERY		
QTY & capacity of battery	1 x 12V-7Ah	1 x 12V-9Ah
Charging period	4~6 hours recover to 90% capacity	
PROTECTION & FUNCTION		
PROTECTION	1. Battery low voltage protection 2. Overload protection 3. Short circuit protection	
FUNCTION	1. Auto re-starts when AC recovers 2. Silence setup 3. Automatic charging (offline charging)	
MANAGEMENT		
Interface	RJ45/11 / USB	
PHYSICAL		
Unit dimension (mm)	250*95*140	250*95*140
Gross weight (1pc, kg)	3.9	4.3

www.baykee.com.pk

*Product specifications are subject to change without further notice.

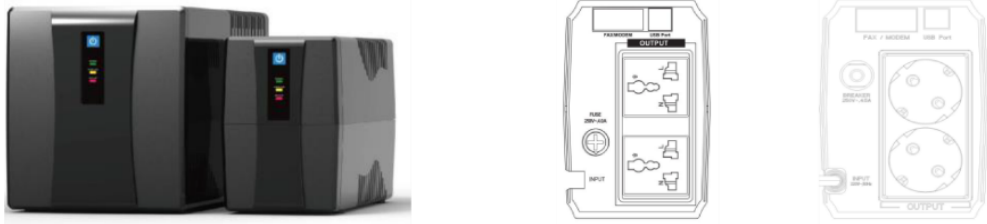

1 - GCP Housing Society,
 Nazaria-e-Pakistan Road,
 Johar Town, Lahore.
 Cell # 0336-4000100
 Tel : +924235300112-14
 Email: info@baykee.com.pk

Aerospace Baykee is a Production Brand of

- IT Infrastructure
- Power Quality Service Providers
- Medium and Large Power UPS
- Power Supply and EPS Power Supply
- High-Power Modular UPS Power Supply